

TENDERS

CONVEY-ALL™



DURABLE. FUNCTIONAL. **RELIABLE.**

CONVEY-ALL™

DURABLE.

At Convey-All™, quality materials and heavy-duty components are always standard, along with our precision manufacturing techniques. When you need a product that is durable, rugged and dependable for those critical seeding and harvest seasons, choose Convey-All™



FUNCTIONAL.

Our no-nonsense, straight forward designs make our products simple and operator friendly, assuring versatility, convenience and functionality.



RELIABLE.

With over 35 years of experience, Convey-All™ understands the needs and expectations of our customers. We are committed to developing the most usable, innovative and quality products with service excellence for our customers.



MAXIMUM EFFICIENCY **PROVEN PERFORMANCE**

In a highly technical and ever evolving industry, Convey-All™ Tenders set the standard for effective and innovative solutions for your Farm and Agri-business. Convey-All Industries Inc. is committed to supplying an extensive line of Seed Tenders enabling premium efficiency on the farm, as well as delivering quality product to the marketplace.

Convey All™ is dedicated to providing the tools required to achieve maximum performance on the farm and in the field. We strive to deliver durable, functional and reliable products. And we don't stop there. Dependability and efficiency are at the core of every Convey-All™ Seed Tender.

Our multi compartment stainless steel tenders are designed to transport seed and fertilizer simultaneously without damage or cross-contamination. The advanced unloading belt conveyor system ensures gentle and time efficient seed delivery directly into your air seeder, reducing your fill time significantly.




THE **HEIGHT** AND **SWING RADIUS** OF THE **CST-1550'S** UNLOAD CONVEYOR MAKES FILLING OUR DRILLS FAST AND EFFICIENT.
 Dallas and Glenn Pederson, Pederson Heritage Farms



Model	Discharge Heights Min/Max	Swing Diameter	Empty Weight	Ft ³ / Comp. (Total)	Units / Comp. * (Total)	Bushels / Comp. (Total)	Compartment Capacity ** Imperial	Compartment Capacity ** Metric	Total Capacity ** Imperial	Total Capacity ** Metric
CST-1550	8' 2" @ 15° 18' 8" @ 40°	144° Swing 43' 2" Reach	25,060 lb	258.5 (1551)	320 (1920)	208 (1248)	8 Ton	7.3 MT	48 Ton	43.6 MT

Table is base on liquid measurements, and does not account for piling above the side walls. * Units based on 50 lb/unit. ** Capacity based on 62 lb/ft³.

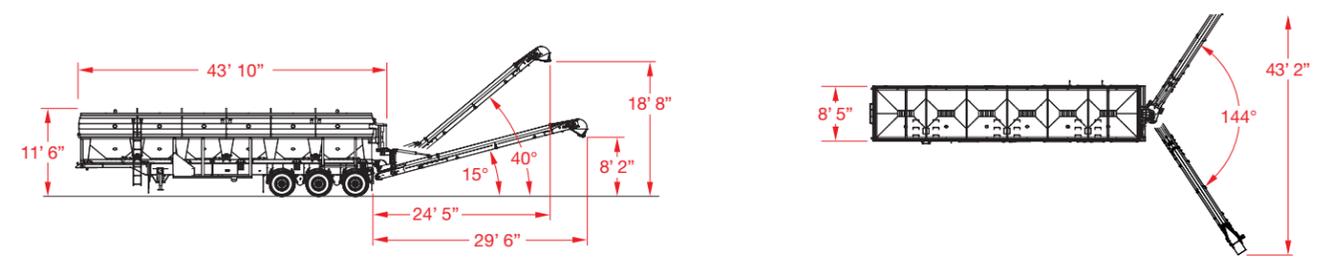

Powered by a 50 hp diesel engine, the Convey-All™ CST-1550 is equipped with its own hydraulic system, taking your seeding process to new levels of efficiency. Save time with the advanced, unloading belt conveyor system that ensures gentle and efficient seed delivery directly into your air seeder.

The six compartment, stainless steel tank is designed to transport seed and fertilizer simultaneously without damage or cross-contamination. At an unload rate of 2 tons/min, you will reduce fill time significantly allowing you to unload a total of 1550 cubic feet in under 20 minutes.

FULLY EQUIPPED:


- Tier 4, diesel engine
- 6 compartments
- Stainless steel slave conveyor construction
- Stainless steel slopes & gates
- 12 gauge hopper construction
- Two stage - epoxy/polyurethane coating system
- 20" wide, slave conveyor belt
- 25' long, 16" paddle belt, unload conveyor
- Self-contained hydraulics
- Aluminum anodized hydraulic valves
- Camera package
- Weigh scale package
- LED working lights
- External ladder
- 2 sight glasses per compartment
- LED gate indicators
- Air ride trailer
- Aluminum outer wheels with polyethylene fenders

TRANSPORT MULTIPLE VARIETIES OF SEED AND/OR FERTILIZER USING **CONVEY-ALL'S COMMERCIAL SEED TENDERS**
 CST-1500 pictured



Model	Discharge Heights Min/Max	Swing Diameter	Empty Weight	Ft ³ / Comp. (Total)	Units / Comp. * (Total)	Bushels / Comp. (Total)	Compartment Capacity ** Imperial	Compartment Capacity ** Metric	Total Capacity ** Imperial	Total Capacity ** Metric
CST-1500	8' 8" @ 15° 19' 1" @ 40°	144° Swing 42' 7" Reach	25640 lb	276 (1380)	342 (1710)	222 (1110)	8.6 Ton	7.8 MT ea.	43 Ton	39 MT

Table is base on liquid measurements, and does not account for piling above the side walls. * Units based on 50 lb/unit. ** Capacity based on 62 lb/ft³.

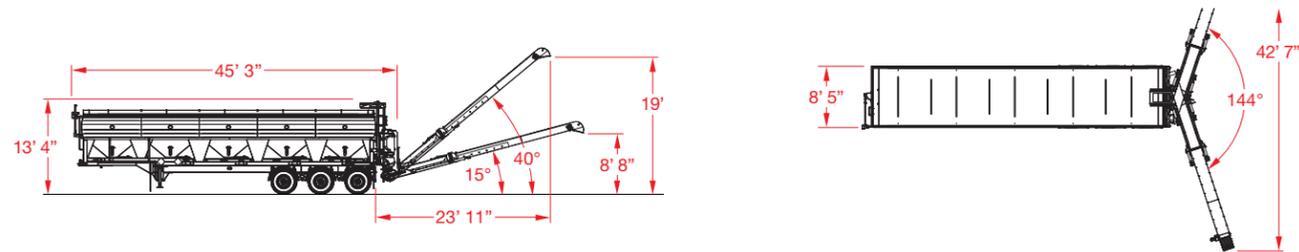

The CST-1500 is one of the largest tenders on the market. This five compartment tender is able to transport fertilizer and/or seed at the same time. The use of conveyors, ensures no seed damage or cross-contamination. Unload at a rate of 2 tons per minute.

This tender will reduce your seeding down time significantly, while giving you the versatility to use it year round. Weigh and transport seed to your air seeder in spring. Unload grain from your combine during harvest and haul product to the market any time.

STANDARD FEATURES:

- Tier 4, diesel engine
- 5 compartments
- Stainless steel slave conveyor construction
- Stainless steel slopes & gates
- 12 gauge hopper construction
- Two stage - epoxy/polyurethane coating system
- 20" wide, slave conveyor belt
- 25' 7" long, 16" paddle belt, unload conveyor
- Self-contained hydraulics
- Aluminum anodized hydraulic valves
- Camera package
- LED working lights
- Internal cat walk
- External ladders
- 2 sight glasses per compartment
- Access holes
- LED gate indicators
- Air ride trailer
- Aluminum outer wheels with polyethylene fenders

OPTIONS:

- Weigh scale package
- Chrome fenders

MINIMIZE CROSS-CONTAMINATION AND DAMAGE TO PRODUCT WITH **CONVEY-ALL'S COMMERCIAL SEED TENDERS**
 CST-2434 pictured



Model	Length	Width	Height *	Discharge Heights * Min/Max	Swing Diameter	Empty Weight	# of Comp.	Ft ³ / Comp. (Total)	Units / Comp. ** (Total)	Bushels / Comp. (Total)	Comp. Capacity *** Imp (Metric)	Total Capacity *** Imp (Metric)
CST-1634	27' 3"	8'	13' 8"	9' 9" @ 23° 11' 10" @ 30°	80° Swing 25' 7" Reach	5200 lb	2	294 (588)	365 ea. (730)	236 ea. (472)	9.1 Ton ea. (8.3 MT ea.)	18.2 Ton (16.6 MT)
CST-1834	29' 4"	8'	13' 8"	9' 9" @ 23° 11' 10" @ 30°	80° Swing 25' 7" Reach	5800 lb	3	221 (663)	274 ea. (822)	178 ea. (534)	6.9 Ton ea. (6.2 MT ea.)	20.7 Ton (18.6 MT)
CST-2034	31' 3"	8'	13' 8"	9' 9" @ 23° 11' 10" @ 30°	80° Swing 25' 7" Reach	6300 lb	3	2 - 221 1 - 294 (736)	2 x 274 1 x 365 (913)	2 x 178 1 x 236 (592)	2 x 6.9 Ton 1 x 9.1 Ton (2 x 6.2 MT) (1 x 8.3 MT)	22.9 Ton (20.7 MT)
CST-2434	35' 4"	8'	13' 8"	9' 9" @ 23° 11' 10" @ 30°	80° Swing 25' 7" Reach	n/a	3	294 (882)	365 ea. (1095)	236 ea. (708)	9.1 Ton ea. (8.3 MT ea.)	27.3 Ton (24.9 MT)

Table is base on liquid measurements, and does not account for piling above the side walls. * Measurements based on 48" high truck bed. ** Units based on 50 lb/unit. *** Capacity based on 62 lb/ft³. The width indicated does not include the truck width.

Truck-mounted tenders not available in all regions



The Convey-All™ Truck-Mounted Series of Commercial Seed Tenders (CST) can be used to fill floaters, fertilizer spreaders, lower air seeder commodity carts and more. The multiple compartment design allows a variety of different products to be hauled on the same trip.

Using the unload conveyor system minimizes the risk of cross-contamination or product damage. Available in four different tank lengths, this series is designed to mount on your standard 34" truck frame.

STANDARD FEATURES:

- Manufactured for a 34" rail mount
- 34" frame mounting equipment included
- 12 gauge compartment construction
- Stainless steel hopper slopes and gates
- 20' long, 10" diameter tube, 16" wide paddle belt, unload conveyor

- Full length catwalk and rear ladder
- 2 sight glasses per compartment
- High quality electric roll tarp
- Manual hydraulic controls
- Two stage - epoxy/polyurethane coating system

OPTIONS:

- Self-contained hydraulic pack
- Stainless steel conveyor(s)
- Wireless remote control
- Polyethylene fenders
- Fender mounts

BTS-410

The BTS-410 Tender can convey up to 1500 lb/min, and has a 50/50 split compartment.

STANDARD FEATURES:

- 5.5 hp gas engine
- Manual roll tarp
- 2 button remote control
- Ladders, front and rear

OPTIONS:

- 18' or 21' long conveyor tube
- Full wireless remote
- Weigh scale package
- Extendable downspout
- Trailer with electric brakes



WT-295

The WT-295 Tender has a 50/50 split compartment, and features a 16" wide belt which can unload 3500 lb/min.

STANDARD FEATURES:

- 13 hp gas engine
- Manual roll tarp
- 2 button remote control
- Ladders, front and rear

OPTIONS:

- Full wireless remote
- Weigh scale package
- Trailer with electric brakes



PT-100

The PT-100 Pro Box Tender holds 2 boxes, and can discharge 1500 lb/min.

STANDARD FEATURES:

- 5.5 hp gas engine
- Holds 2 pro boxes
- 2 button remote control

OPTIONS:

- Extendable downspout
- Trailer with electric brakes



BTS-2950

The BTS-2950 Tender has a 50/50 split compartment. The conveyor can unload at a rate of 1500 lb/min.

STANDARD FEATURES:

- 5.5 hp gas engine
- Manual roll tarp
- 2 button remote control
- Ladders, front and rear

OPTIONS:

- Full wireless remote
- Weigh scale package
- Extendable downspout
- Trailer with electric brakes



BTS-115

The BTS-115 Tender features a single compartment with a steel lid. It can convey 1500 lb/min.

STANDARD FEATURES:

- 5.5 hp gas engine
- 2 button remote control
- Rear ladder

OPTIONS:

- 3' conveyor tube extension
- Full wireless remote
- Extendable downspout
- Trailer with electric brakes



BTS = Bean Tender-Swing | WT = Weigh Tender | PT = Pro-Box Tender



The Convey-All™ Bean Tenders are a fast, effortless way to fill any planter; including centre fill models. The unload conveyor has all the swing and reach required to fill a 16 row, 30" spacing planter, or a 24 row, 22" spacing planer with one setup.

Every bean tender comes with a 2-button remote throttle control. A full remote control is available for all the tenders, except the PT-100. The deck mount frame offers the convenience of mounting your tender onto a trailer, truck bed, or order your tender already mounted on a custom Convey-All™ trailer.

Model	Conveyor Size	Overall Length	Hopper Length	Hopper Height	Hopper Width	Discharge Height	Conveyor Height	Conveyor Swing	Empty Weight (Trailer Not Incl.)	Total Units	Total Bushels
PT-100	21', 8" Tube, 10" Belt	32' 2"	8' 3"	n/a	n/a	8' 11"	12' 7"	180°	1550 lb	100	80
BTS-115	18', 8" Tube, 10" Belt	22' 2"	7'	7' 5"	7'	8' 3"	10'	90°	2125 lb	115	92
WT-295	20', 10" Tube, 16" Belt	25' 3"	11' 11"	8' 7"	8' 5"	9' 7"	12' 6"	140°	2950 lb	295	235
BTS-2950	21', 8" Tube, 10" Belt	24' 7"	11' 11"	8' 5"	8' 5"	8' 3"	10'	140°	3000 lb	295	235
BTS-410	8' Tube, 10" Belt	26' 1"	14' 6"	9' 3"	8' 5"	8' 5"	12' 2"	140°	3250 lb	410	330

CONVEY-ALL™

DURABLE. FUNCTIONAL. **RELIABLE.**

(800) 418-9461 | www.convey-all.com | tenders@convey-all.com